


3" 45° Quick Flow Foot Valve

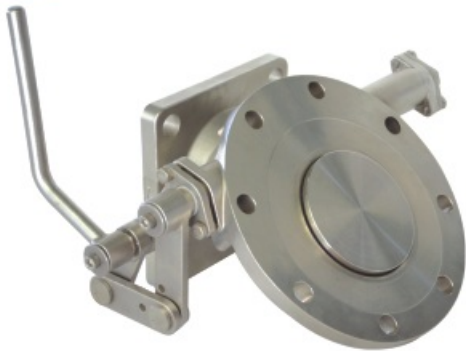

3" 45° Quick Flow Foot Valve—Inlet flange drilled $8 \times \phi 14$ mm holes equi-spaced on a PCD 178mm, Outlet flange drilled $4 \times \phi 18$ mm holes equi-spaced on a PCD 160mm.

Option-Shutting-off device for emergency and fusible link.

Part No. : JX468001-00

Connection :

Flange drilled $8 \times \phi 14 \times \text{PCD}178$

Outlet $4 \times \phi 17 \times \text{PCD}160$

Nominal Diameter: 80mm



Nominal Pressure: 6Bar

Contact Parts: 316


Fitted with FEP/Silicon Encapsulated O-Ring

Design Temperature: $-40^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Fitting Details

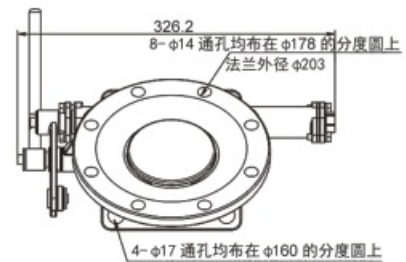

Part Drawing

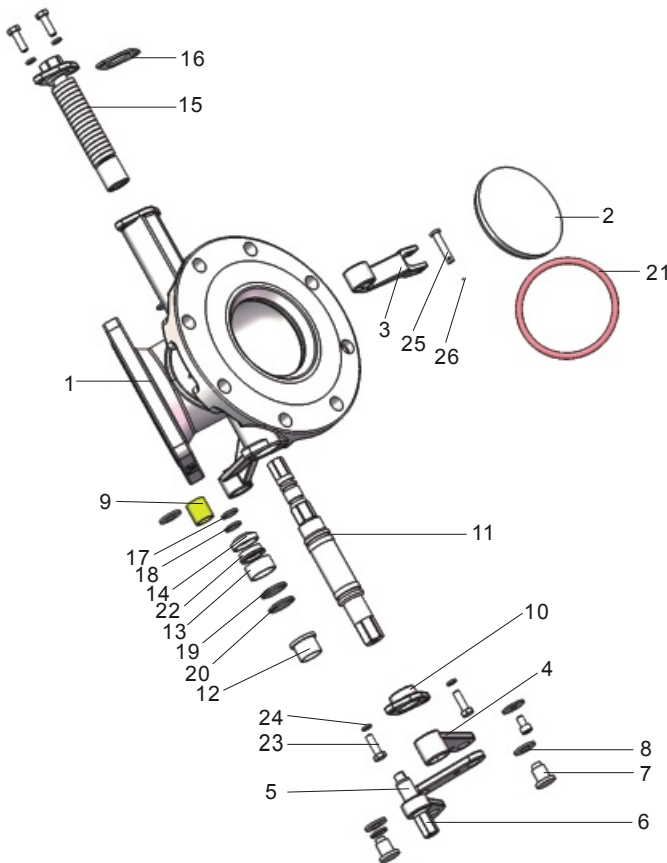

Note: Spare parts for repair are available separately.

Item	Part No.	Description
1	JX468001-01	Body
2	JX468001-02	Solid Poppet
3	JX468001-03	Crank Block Assembly
4	JX468001-04	Connecting Link 1
5	JX468001-05	Connecting Link 2
6	JX468001-06	Connecting Link 3
7	JX468001-07	Hinge Pin
8	JX468001-08	Plain Washer
9	JX468001-10	Bushing
10	JX468001-11	Stuffing Clamp
11	JX468001-12	Spindle
12	JX468001-13	Bearing
13	JX468001-14	Bearing
14	JX468001-15	Bearing
15	JX468001-26-00	Spring Assembly
16	JX468001-19	Gasket
17	8561000011.5*2.6	O-Ring
18	8532000011.2*2.65	O-Ring
19	8561000021*2.6	O-Ring
20	8532000020*2.65	O-Ring
21	JX468001-24	O-Ring
22	JX468001-30	Bushing
23	85983300M6*20	Bolt
24	859811006	Spring Washer
25	859964006*30	Hinge Pin
26	LS212501	Split Pin
27	859860002.5*14	Split Pin