





Anti-overflow Breathing Valve (External Thread) - threaded connection. Installed on the top of the tank car, the opening pressure of expiratory is 6 ~ 12KPa, and the opening pressure of inspiratory is -4 ~ 2KPa. Fire retardant nets are installed. With anti-overflow function, when the tank is tilted or turned over, prevent the tank medium from flowing out.

Fitting Details

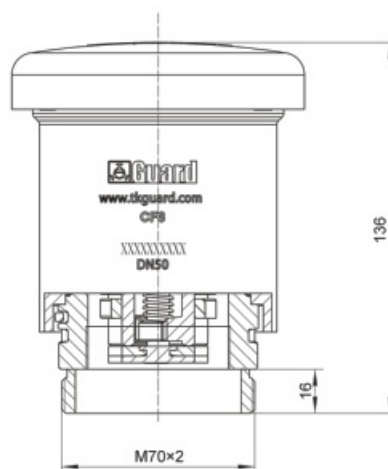

Part No : 18500006-00
 Norminal Diameter: 50MM
 Nominal Pressure: 6Bar
 Design Temperature: -40°C ~ +120°C
 Contact Part: CF8
 Seal: NBR

Part Drawing

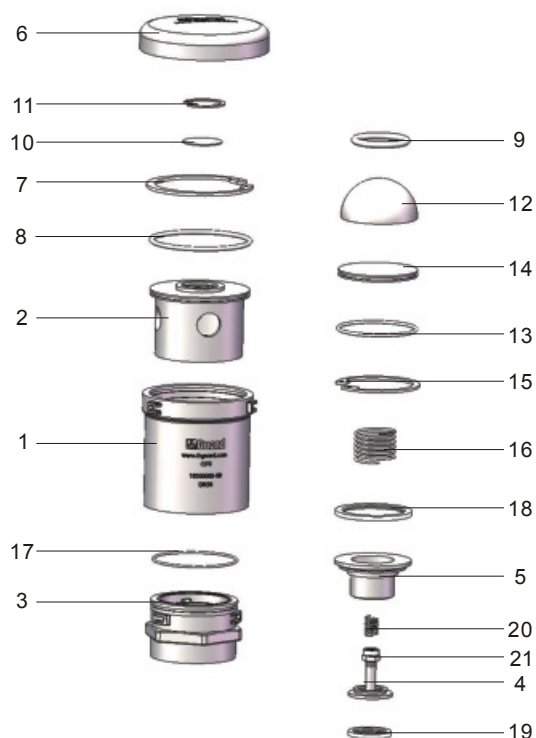

Item	Part No.	Description
1	18500006-01-00	Body
2	18500005-02	Seal Seat
3	18500005-03	Seat
4	18500005-04	Solid Poppet
5	18500005-05	Solid Poppet
6	18500005-06	Cap
7	8598150082	Ring
8	8531000077.5*1.8	O-ring
9	8531000037.5*5.3	O-ring
10	18500005-07	Wire Fabric Arrestor
11	8598150032	Ring
12	18500004-03	Ball
13	8531000061.5*1.8	O-ring
14	18500005-08	Wind Screen
15	8598150065	Ring
16	18500005-09	Spring
17	85310000967*1.8	Ring
18	18500005-10	Gasket
19	18500005-11	Gasket
20	18500005-12	Spring
21	85985500M8	Nut
22	85988700M6*8	Nut