


3" 45° Foot Valve (left open)

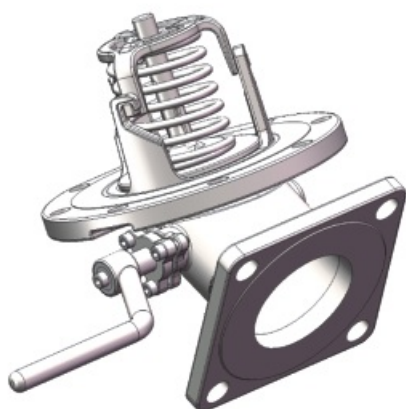

3" 45° Foot Valve (left open)—Flange drilled $8 \times \phi 14 \times \text{PCD} 178$. Outlet $4 \times \phi 18 \times \text{PCD} 160$.

Option-Shutting-off device for emergency and fusible link.

Fitting Details

Part No. : JS468026-00

Connection:

Flange drilled $8 \times \phi 14 \times \text{PCD} 178$

Outlet $4 \times \phi 18 \times \text{PCD} 160$

Nominal Diameter: 80mm


Nominal Pressure: 6Bar

Contact Parts: 316


Fitted with FEP/Silicon Encapsulated O-Ring

Design Temperature: $-40^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Weight: 7.8kg

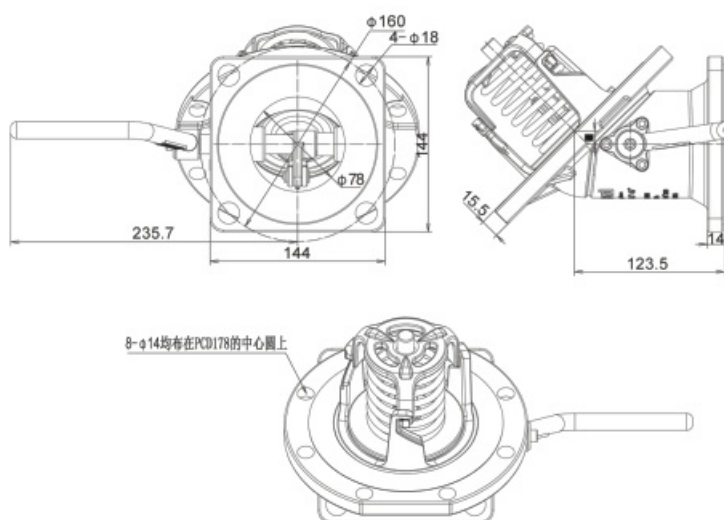

Part Drawing

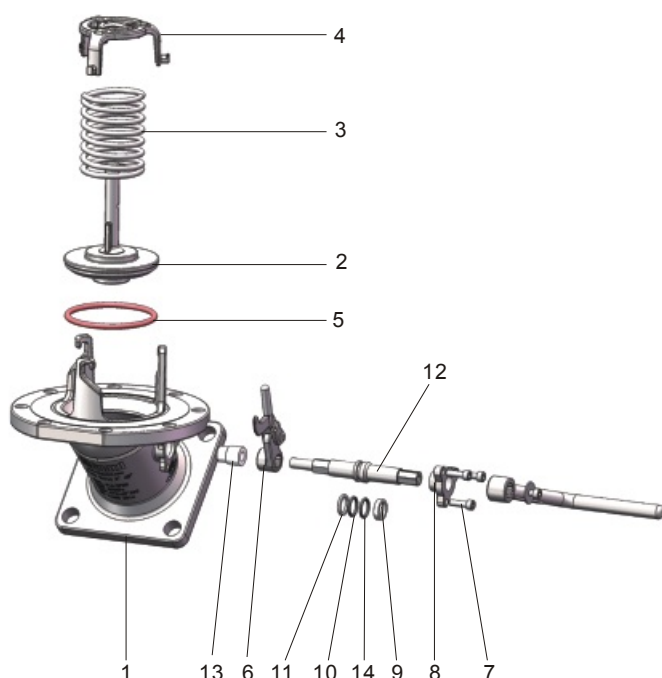

Item	Part No.	Description
1	JS46802605	Body (left open)
2	JS46800902	Solid Poppet
3	JS46800103	Spring
4	JS46800903	spring top plate
5	JS46800105	81.92*5.33 O-ring
6	JS4680260200	Crank Block Assembly (left open)
7	8100M6*20	M6*20 Screw
8	JS36800108	Stuffing Clamp
9	JS46800109	Spindle Packing
10	JS46800110	15.54*2.62 O-ring
11	JS46800111	Spindle Packing
12	JS46800904	Spindle
13	JS46800905	Crankshaft End Bush
14	DLJ6800117	13.4*3 O-ring