



DN500 With stands 4Bar Pressure Manlid Assembly -With DN300 Inspection, when using PTFE coated EPDM seal ring, bolt locking torque up to 90N.m, pressure resistant 4Bar (25°C). manlid cover with inspection cover, save tank opening. It is suitable for the tank car whose detection pressure is 4Bar.

Standard M16 stainless steel swing bolt assembly.

The gasket is provided separately.

Fitting Details

Part No : R356AC08-00

Nominal Diameter : 500mm



Text Pressure : 4Bar(58PSI)

Points : 6

Design Temperature : - 40°C ~ + 200°C


Cover Weight: 20kg

Neckring Weight: 8kg

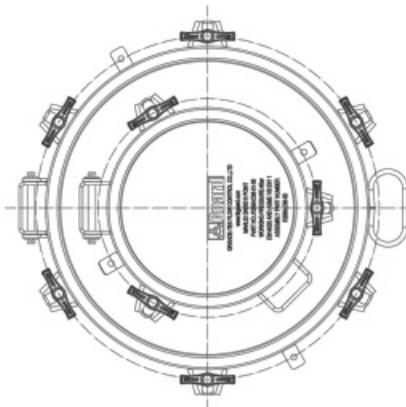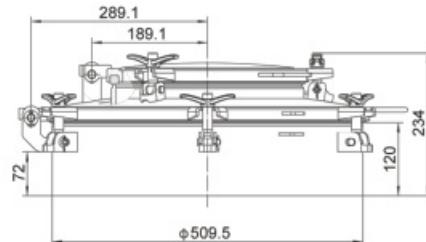

Temperature range depends on the seal.
Neckring profiled to suit tank radius.

Part Drawing

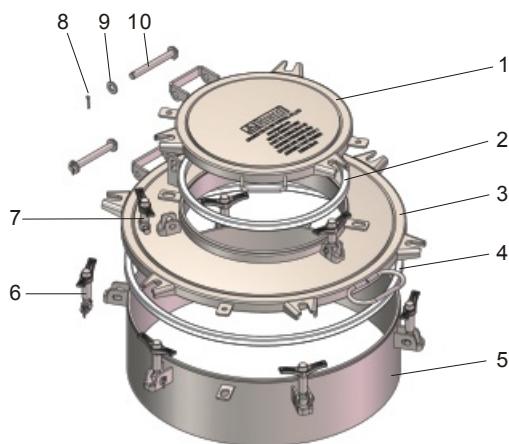

Item	Part No.	Description
1	R356AC08-01-00	Dn300 Inspection Cover
2	See Seal Data	Seal (Sold Separately)
3	RL169001-00	DN500 Manlid Cover
4	See Seal Data	Seal(Sold Separately)
5	R356AC04-02-00	Neckring
6	RL169001-00	Swingbolt Assembly
7	RL166001-00	Swingbolt Assembly
8	859860003.2*20	Split Pin
9	8598100012	Washer
10	0250A001-03	Hinge Pin