



DN500 Manlid Assembly With DN300 Inspection - 8 points. Manlid cover with DN300 inspection. Various heights are available.

Stainless steel swing bolt with stainless steel nut. With customs lead seals, seal sold separately.

Option-With low profile neckring. According to the requirements of the tank strength level, the thickness of the neckring is 6mm.

Option-The maximum opening angle is standard 135° and optional 120° .


Fitting Details

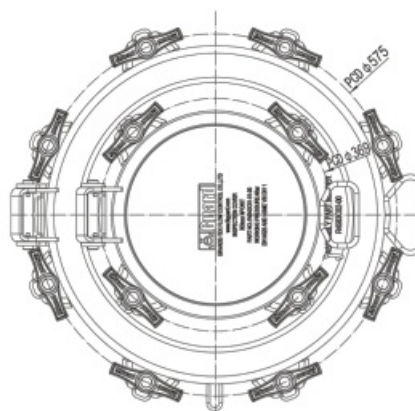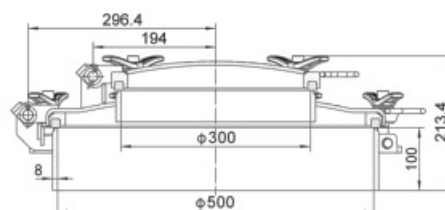

Part No.: R4583C02-00
 Nominal Diameter : 500mm
 Design Pressure : 4Bar(58PSI)
 Test Pressure : 6Bar(87PSI)
 Points : 8
 Design Temperature : - 40°C ~ + 200°C
 Weight: 25.5kg
 Neckring Weight: 11.5kg

Temperature range depends on the seal.
 Neckring profiled to suit tank radius.

Part Drawing

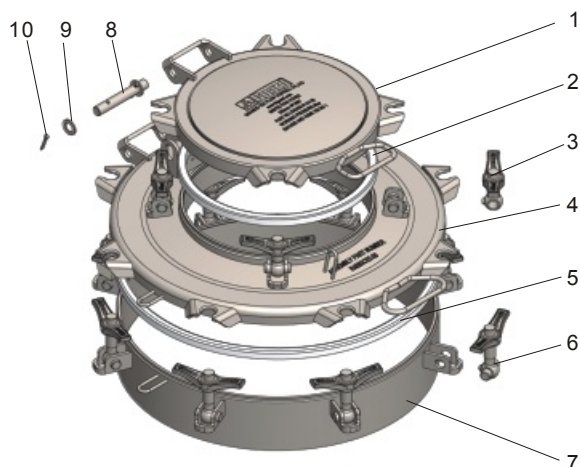

Item	Part No.	Description
1	R4343C01-01-00	DN300 Cover
2	见密封件数据表	Seal
3	R4583A01-14-00	Bolt Assembly
4	R4583C02-01-00	DN500 Cover
5	见密封件数据表	Seal
6	R4583A01-13-00	Bolt Assembly
7	R4583C01-02-00	DN500 Neckring
8	R4583A01-03	Hinge Pin
9	R4583A01-12	Gasket
10	859960004*25	Split Pin