





4" Clamped Butterfly Valve—Left hand operated with TIR to handle. Contact parts in 316 stainless steel with PTFE main seal.

## Fitting Details

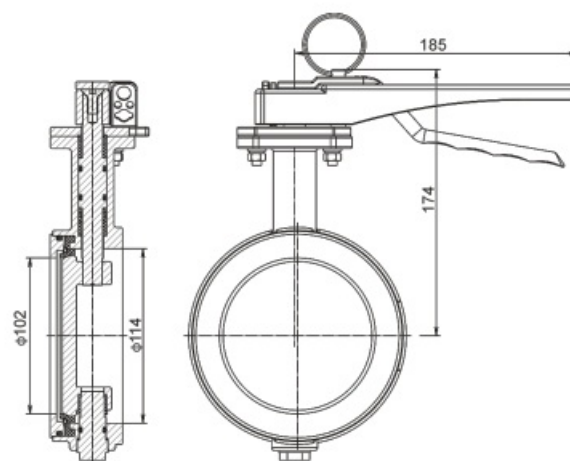

Part No. : DLJ64C01-00  
 Connection: Clamped  
 Nominal Diameter: 100mm  
 Nominal Pressure: 6Bar  
 Contact Parts: 316  
 Seal: PTFE  
 Design Temperature: -40°C ~ 200°C

## Part Drawing

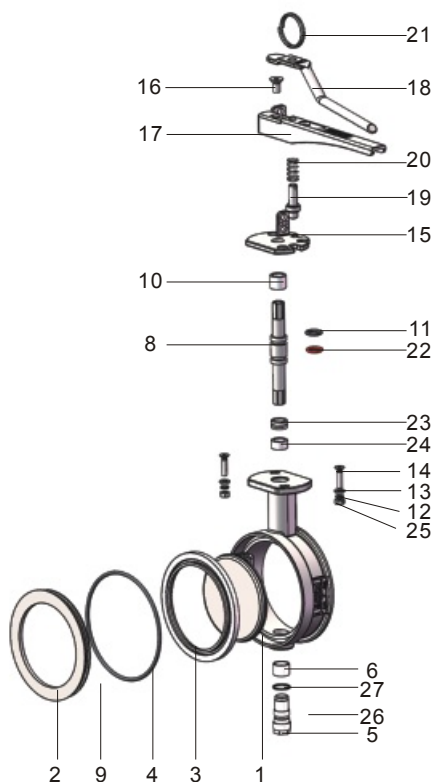

Note: Spare parts for repair are available separately.

| Item | Part No.         | Description            |
|------|------------------|------------------------|
| 1    | DLJ64C01-01      | Body                   |
| 2    | DLJ64C01-02      | Seal Clamp Plate       |
| 3    | DLJ64C01-03      | Main Seal              |
| 4    | DLJ64C01-08      | U-Ring                 |
| 5    | DLJ64C01-09      | Bottom Spindle         |
| 6    | DLJ64C01-06      | Bottom Bush            |
| 7    | DLJ64C01-04      | Closure Plate          |
| 8    | DLJ68001-07      | Spindle                |
| 9    | 85320000110*3.55 | O-Ring                 |
| 10   | DLJ68001-09      | Split Bearing          |
| 11   | DLJ68001-10      | O-Ring                 |
| 12   | 85984400M6       | Nut                    |
| 13   | 859811006        | Spring Washer          |
| 14   | 85988800M6*25    | Countersunk Setscrew   |
| 15   | DLJ68001-11      | Stuffing Clamp         |
| 16   | 85988800M8*16    | Countersunk Setscrew   |
| 17   | DLJ68002-12      | Handle                 |
| 18   | DLJ68002-13      | Operating Lever        |
| 19   | DLJ68001-14      | Handle Location Pin    |
| 20   | DLJ68001-15      | Handle Location Spring |
| 21   | DLJ68001-16      | Split Ring             |
| 22   | DLJ68001-17      | Encapsulated O-Ring    |
| 23   | DLJ68001-18      | Spindle Packing        |
| 24   | DLJ68001-19      | PTFE Bearing           |
| 25   | 859810006        | Washer                 |
| 26   | 8532000014*2.65  | O-Ring                 |
| 27   | DLJ64C01-07      | Bottom Bearing         |